


PARAFAST RHINO BOND STANDARD FASTENING PATTERN

PARASOLO PVC ROOF MEMBRANE - RIGID INSULATION (HEAT INDUCTION SYSTEMS)

APPROVED STEEL AND CONCRETE DECKS


FIELD AREA

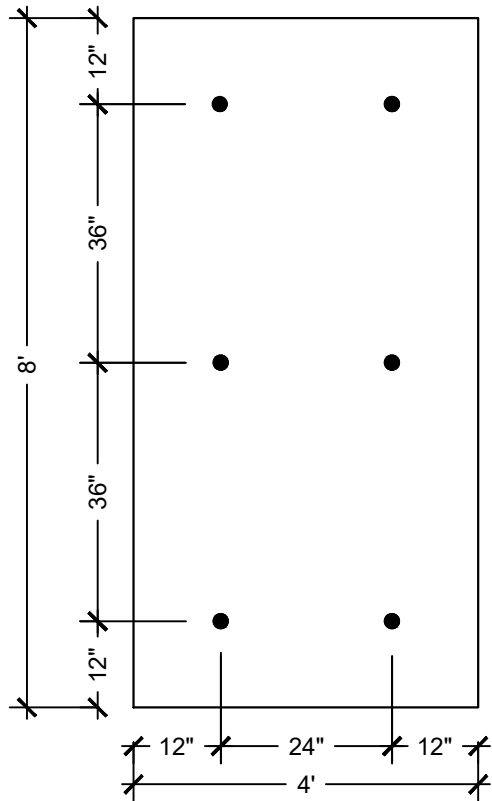

6 FASTENERS PER BOARD

(1 FASTENER PER 5.33 sq ft)


PERIMETER AREA

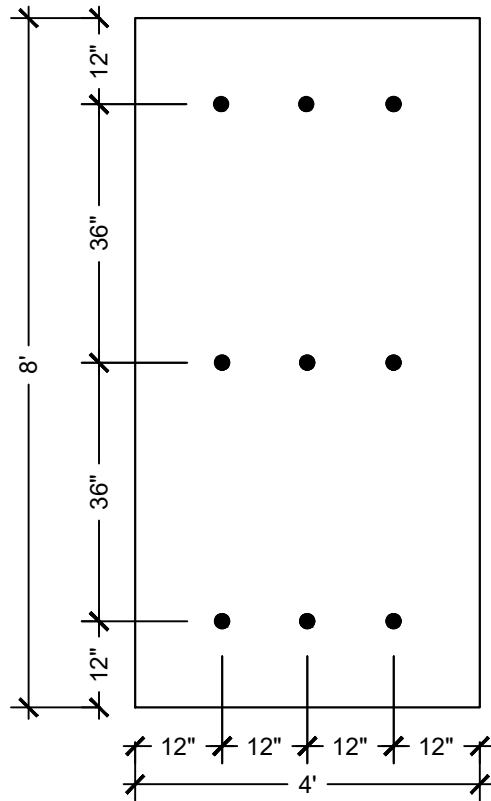

9 FASTENERS PER BOARD

(1 FASTENER PER 3.56 sq ft)

CORNER AREA

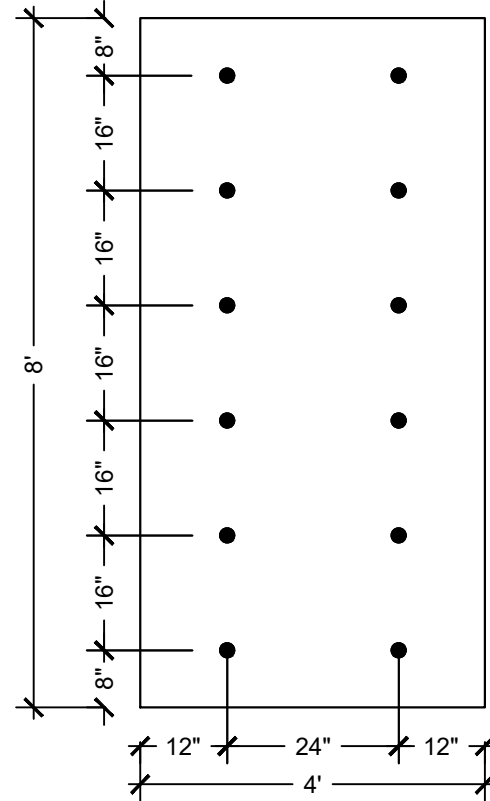

12 FASTENERS PER BOARD

(1 FASTENER PER 2.7 sq ft)

NOTES:

1. REFERENCE SPECIFIC SYSTEM/INSULATION TYPE AND THICKNESS REQUIREMENTS.
2. REFER TO THE PARAFAST RHINO BOND APPLICATION AND SPECIFICATION MANUAL FOR FASTENER AND DECK REQUIREMENTS.
3. CONTACT SIPLAST FOR RECOMMENDED FASTENING FREQUENCIES TO MEET SPECIFIC TESTING, CODE AGENCY OR GUARANTEE REQUIREMENTS.

N.T.S